



# Eagle Lighting Inc. Lighting the Way with Value

1782 East Person Memphis, TN 38114 Phone (901) 948-3225 & Fax (901) 946-3003

## WP250 LARGE WALL PACK

### Design Features:


Rugged die-cast aluminum housing for durability with Chromate Conversion Coating, Textured Bronze Finish  
 One Piece Anodized Aluminium Reflector  
 Porcelain Mogul Socket  
 Borosilicate Glass is Hinged and Removable  
 Conduit Access Back, Bottom, & Sides  
 Silicone Rubber Gasket to Prevent Leakage  
 Meets **UL 1572** requirements for Wet Locations  
 Meets "**DARK SKY**" Requirements w/cut-off Accessories.  
 Ideal for 400W **MH** or **HPS MAX**  
 Contact Factory **IES Photometric** Files.

### Applications:


Storage Areas, Parking Areas, Tunnels  
 Underpasses, Loading Docks & Walkways

### Owner Benefits:


VALUE - high benefit to cost ratio with proven system design & components - **Made in USA**  
 Full **One Year Warranty** - Environmentally friendly  
 Each luminaire is tested before shipping  
 All Lamps **INCLUDED**.

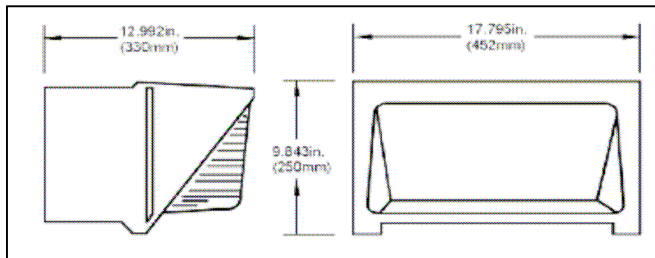

DIMENSIONS

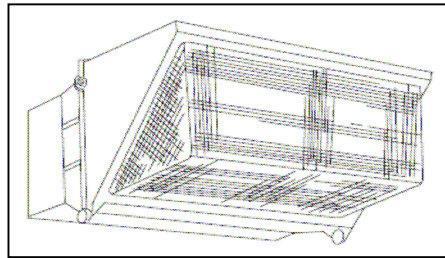


LINE DRAWING



SIDE CUT-OFF



FULL CUT-OFF



WIRE GUARD

EPA-1.56 FT CU  
 14.37 LBS EA

### ORDERING INFORMATION

	<u>Product</u>	<u>Wattage</u>	<u>Lamp</u>	<u>Voltage</u>	<u>Accessories</u>
Example:	<b>WP250</b>	<b>40</b> 400 WATT	<b>HPS</b> High Pressure Sodium	<b>240</b> 240 Volt	<b>WG</b> Wire Guard

### Ordering Options

<u>Product</u>	<u>Wattage</u>	<u>Lamp</u>	<u>Voltage</u>	<u>Accessories</u>
<b>WP250 =</b> Wall Pack	<b>25=250W</b> <b>40=400W</b>	<b>HP = HPS</b> <b>MH = Metal Halide</b> <b>INC=Incandescent</b>	<b>120 = 120V</b> <b>208 = 208V</b> <b>240 = 240V</b> <b>277 = 277V</b> <b>480 = 480V</b> <b>MT = 120/208/240/277</b>	<b>SC=Side Cut-off</b> <b>FC=Full Cut-off</b> <b>WG=Wire Guard</b> <b>VG=Vandal Guard</b> <b>PC=Photocell</b>

Lamp Type	ANSI	Lamp Watts	Volts	Line Amps (Oprng)	Input Watts	Circuit Type
HPS	S50	250	120/208/240/277/480	2.5/ 1.4/ 1.2/ 1.1/ .60	300	CWA
HPS	S51	400	120/208/240/277/480	4.0 /2.2 /1.9 /1.6 /1.0	465	CWA
Metal Halide	M58 OR H37	250	120/208/240/277/480	2.5/ 1.4/ 1.25/ 1.1/ .65	280	CWA
Metal Halide	M59 OR H33	400	120/208/240/277/480	4.0 /2.3 /2.0 /1.7 /1.0	458	CWA

Approved by: \_\_\_\_\_