



# Eagle Lighting Inc. Lighting the Way with Value

1782 East Person Memphis, TN 38114 Phone (901) 948-3225 & Fax (901) 946-3003

## WP200 LARGE WALL PACK

### Design Features:


Rugged die-cast aluminum housing for durability with Chromate Conversion Coating, Textured Bronze Finish  
 One Piece Anodized Aluminium Reflector  
 Porcelain Mogul Socket  
 Borosilicate Glass is Hinged and Removable  
 Conduit Access Back, Bottom, & Sides  
 Silicone Rubber Gasket to Prevent Leakage  
 Photocell Adaptable  
 Meets **UL 1572** requirements for Wet Locations  
 Meets "**DARK SKY**" Requirements w/cut-off Accessories.  
 Ideal for **250W MH** or **HPS MAX**  
 Contact Factory for Photometric files.

### Applications:


Storage Areas, Parking Areas, Tunnels  
 Underpasses, Loading Docks & Walkways

### Owner Benefits:

VALUE - high benefit to cost ratio with proven system design & components - **Made in USA**  
 Full **One Year Warranty** - Environmentally friendly  
 Each luminaire is tested before shipping  
**HID Lamp Included.**

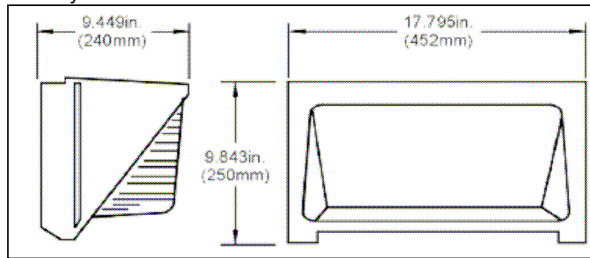


DIMENSIONS

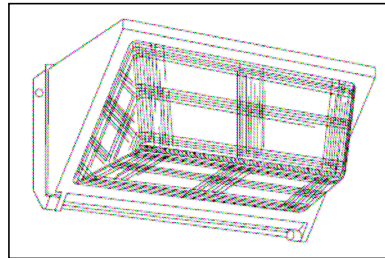

LINE DRAWING


### ACCESSORIES



SIDE CUT-OFF



FULL CUT-OFF



WIRE GUARD

EPA-1.56 FT CU  
 14.37 LBS EA

### ORDERING INFORMATION

	<u>Product</u>	<u>Wattage</u>	<u>Lamp</u>	<u>Voltage</u>	<u>Accessories</u>
Example:	<b>WP200</b>	<b>25</b> 250 WATT	<b>HPS</b> High Pressure Sodium	<b>240</b> 240 Volt	<b>FC</b> Full Cut-off

### Ordering Options

<u>Product</u>	<u>Wattage</u>	<u>Lamp</u>	<u>Voltage</u>	<u>Accessories</u>
<b>WP200</b> = Wall Pack	<b>25</b> =250W <b>17</b> =175W <b>15</b> =150W	<b>HP</b> = HPS <b>MV</b> = Mercury <b>MH</b> = Metal Halide <b>INC</b> =Incandescent	<b>120</b> = 120V <b>208</b> = 208V <b>240</b> = 240V <b>277</b> = 277V <b>480</b> = 480V <b>MT</b> = 120/208/240/277	<b>SC</b> =Side Cut-off <b>FC</b> =Full Cut-off <b>WG</b> =Wire Guard <b>VG</b> =Vandal Guard <b>PC</b> =Photocontrol

Lamp Type	ANSI	Lamp Watts	Volts	Line Amps (Oprtn)	Input Watts	Circuit Type
Metal Halide	M102 OR M142	150	120/208/240/277	1.57 / .91 / .81 / .74	185	CWA
HPS	S56	150	120/208/240/277	1.65 / 1.00 / .85 / .75	465	CWA
Metal Halide	M58 OR H37	250	120/208/240/277/480	2.5 / 1.4 / 1.25 / 1.1 / .65	280	CWA
HPS	S50	250	120/208/240/277/480	2.5 / 1.4 / 1.2 / 1.1 / .60	300	CWA

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Approved by: \_\_\_\_\_