



Eagle Lighting Inc. Lighting the Way with Value

1782 East Person Memphis, TN 38114 Phone (901) 948-3225 & Fax (901) 946-3003

WL30 MINI WALL PACK

Design Features:

Rugged **die-cast aluminum** housing for durability with Power Coat paint finish for corrosion resistance.

Aluminium Specular Reflector

Porcelain Medium Socket

Heat Resistant **Borosilicate Glass** Lens

Conduit Access Back, Bottom, & Sides

Integral Photocontrol

Meets **UL 1572** requirements for Wet Locations.

Applications:

Storage Areas, Public Parks, & Commercial Buildings


Owner Benefits:

VALUE - high benefit to cost ratio with proven system design & components - **Made in USA**

Full **One Year Warranty** - Environmentally friendly

Each luminaire is tested before shipping

Lamp Included.

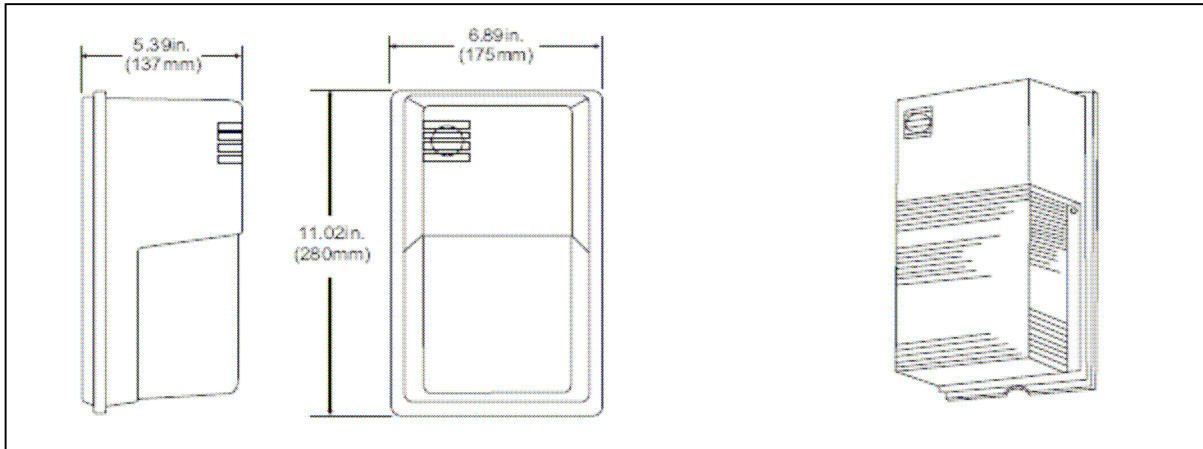

Dimensions

Line Drawing

ORDERING INFORMATION

Product

Wattage

Lamp

Voltage

Example:

WL30

10
100 WATT

HP
HPS

240
240 Volt

Ordering Options

Product
WL30 =
Wall Pack

Wattage
10=100W
07= 70W
05 = 50W

Lamp
HP = HPS
MV = Mercury
MH = Metal Halide
INC=Incandescent

Voltage
120 = 120V
208 = 208V
240 = 240V
277 = 277V
MT = 120/208/240/277

Lamp Type	ANSI	Lamp Watts	Volts	Line Amps (Oprtn)	Input Watts	Circuit Type
Metal Halide	M90, M92	100	120/208/240/277	1.15 / .64 / .50 / .44	130	HX-NPF
HPS	S54	100	120/208/240/277	1.12 / .65 / .60 / .52	122	HX-NPF
Metal Halide	M98	70	120/208/240/277	.77 / .46 / .4 / .35	94	HX-NPF
HPS	S62	70	120/208/240/277	.85 / .52 / .45 / .38	98	HX-NPF
HPS	S68	50	120/208/240/277	.54 / .32 / .28 / .24	65	HX-NPF

Date: _____

Approved by: _____